



Output Ratings

Frequency	Models	Voltage	kVA	kWe
60 Hz	CNY400	208 V	500	400

Ratings at 0.8pf

Rating Definition


Standby Power - Model CNY400

These ratings are applicable for supplying continuous electrical power (at variable load) in event of a utility power failure.

No overload is permitted on these ratings.

Technical data

Engine Model:	NTA855G5
Alternator Model:	HCI534C
Number of Cylinders:	6 Cylinder In-line
Bore/Stroke :in (mm)	5.5 x 6.0 (140 x 152)
Compretn ratio:	14.0:1
Aspiration:	Turbocharged & Aftercooled
Frequency:	60 Hz
Engine Speed:	1800 rpm
Gross engine power: BHP(kWm)	605 (451)
BMEP: psi (kPA)	311 (2147)
Piston Speed: ft/min (m/s)	1800 (9.1)
Fuel Consump: lt / hr - 100%load	110
Heat Rejection to Exhaust System: BTU/min (kWm)	18520 (326)
Heat Rejection to Cooling System BTU/min (kWm)	15125 (266)
Exhaust Temperature: °F (°C)	995 (535)
Radiator cooling Air Flow: m³/seg - FPM	call factory
Exhaust Gas Flow: cfm (liter/s)	3190 (1506)

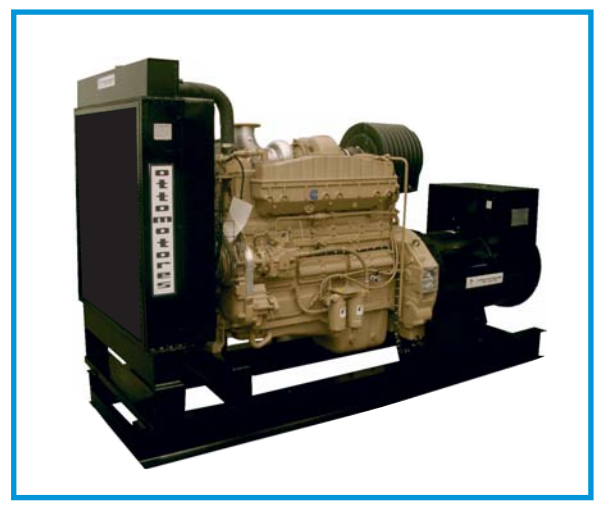

Note: Standard reference conditions 25°C (77°F) Air inlet Temperature. All engines performance data based on the adobe metioned maximum continuous ratings. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85.

Dimensions and Weights

Length:cm	Width:cm	Heigth:cm	Dry: kgs	Wet: kgs
315	114	184	2964	3085

Generating set picture may include optional accessories

CNY400



Ottomotores, S.A de C.V.
 Calz. San Lorenzo No.1150
 Col. Cerro de la estrella, C.P. 09860
 Delg. Iztapalapa México, D.F.
 Tels:52-55-5624-5600
 Fax: 52-55-5426-5521 / 52-55-5426-5581
 Sales: ventas@ottomotores.com.mx

Web site: www.ottomotores.com.mx